
READ THIS FIRST AND STORE PROPERLY FOR FUTURE USE!

ENG

cybex



CLOUD G PRO INFANT CAR SEAT

Owner's Manual

Table of Contents

READ this Owner's Manual carefully before first use and store it for future reference on the bottom of the seat shell (pg 26).

Welcome to CYBEX! 4
Registration/Recall Information 5
Certification 6
Child Usage Guidelines
- Premature Infant Use 8
- Child Requirements 10

Warnings 11
Overview of the CLOUD G PRO Infant Car Seat and Base 25
Product Features
- Full Recline Backrest 29
- Handle Positions 30
- Harness Adjustment 31
- Harness Buckle 31
- Integrated Anti-Rebound 32
- Integrated XXL Canopy 32
- Linear Side-Impact Protection (L.S.P.) System 33
- Load Leg 34
- No-Rethread Harness 35
- Rigid LATCH 36
- SensorSafe™ Chest Clip 37
- Shoulder Pads and Infant Insert 38

Installing and Removing the Infant Car Seat
Installing with Base Using Rigid LATCH (Recommended Installation) 39
Installing with Base Using Lap/Shoulder Belts 43
Installing with Base Using Lap Belt Only 49
Installing without Base Using Lap/Shoulder Belts (Preferred Method) 54
Installing without Base Using Lap/Shoulder Belts (Alternate Method)* 58
Installing without Base Using Lap Belt Only 61
Using the Infant Car Seat
Attaching and Removing the Infant Car Seat from the Base 63
Adjusting the Recline Angle 64
Securing the Child 66
Removing and Replacing Seat Covers 71
Using the Infant Car Seat on Aircraft 75
Care and Cleaning 77
Safety Checklist 78
Resources 79
Warranty 80

* Use this alternate method **ONLY** when the preferred method on 54-57 does not work with your vehicle Lap/Shoulder belts.

Introduction

Welcome to CYBEX! We're thrilled you chose the CYBEX CLOUD G PRO Infant Car Seat. Crafted with German engineering excellence, this product is now available in the United States. We are confident it will provide safer, more comfortable travel for your child and make installation and use effortless for you.

According to the U.S. National Highway Traffic Safety Administration (NHTSA), car seats and Boosters provide protection for infants and children in a crash, yet car crashes are a leading cause of death for children.

Statistics show that over 75% of Child Restraints are being used incorrectly!

Please read and follow these instructions carefully to install the CYBEX CLOUD G PRO Infant Car Seat correctly, even if the installation and use of this Child Restraint might seem simple and intuitive. Before the first use of this Child Restraint, please make sure you have completed all the steps in the Safety Checklist on pg. 78.

Following the American Academy of Pediatrics' recommendations for safe transportation of infants, **we recommend children remain in a REAR-FACING car seat as long as possible, until they reach the highest weight or height allowed by their seat.**

Visit www.aap.org for more information on the Academy's recommendation.

No Child Restraint can guarantee protection from injury in every situation, but proper use helps reduce the risk of death or serious injury. If you have any questions or need assistance, please contact CYBEX Consumer Services at 1-877-242-5676.

Also, please remember to register your Child Restraint so we can contact you in the unlikely event of a recall.

Register online at https://register.cybex-online.com/us/carseats and keep this Owner's Manual for future reference by storing it in the slot on the bottom of the seat shell (pg. 26).

We appreciate your purchase and invite you to visit www.cybex-online.com to see other great CYBEX products.

For step-by-step installation video, scan this QR Code:

Registration/Recall Information

Please complete the registration card that came with your Child Restraint and mail it in immediately or register online.

Child Restraints could be recalled for safety reasons. You must register this Child Restraint to be reached in a recall. Send your name, address, phone number, e-mail address (if available), and the Child Restraint's model number and manufacturing date to:

Columbus Trading-Partners USA Inc.
COLUMBUS TRADING PARTNERS ATTN:
CYBEX Consumer Services PO Box
410127 Charlotte, NC 28241-9905, USA

You may also call CYBEX Consumer Services at 1-877-242-5676, or register online at https://register.cybex-online.com/us/carseats.

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to www.NHTSA.gov.

Regulatory Notice: This Child Restraint system meets all applicable requirements of Federal Motor Vehicle Safety Standard (FMVSS) 213b.

This Child Restraint is certified for use only in passenger and multi-purpose passenger motor vehicles, buses, and trucks equipped with Lap/Shoulder Belt systems.

THIS CHILD RESTRAINT IS CERTIFIED FOR USE IN AIRCRAFT IF USED WITHOUT THE BASE.



Check with your airline before departure to make sure this Child Restraint meets their requirements, then refer to pgs. 75-76 for complete instructions on installing your Child Restraint in aircraft.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

This Child Restraint is designed for use by children in **REAR-FACING MODE ONLY.** To use this Child Restraint properly, children **MUST** meet the size and age requirements specified on pg. 10.

The American Academy of Pediatrics (AAP) recommends keeping children **REAR-FACING** for as long as possible, until they reach the maximum height or weight for their Child Restraint in **REAR-FACING** orientation. [Pediatrics. 2018;142(4):e20182460]

Additionally, some states' laws require children to be **REAR-FACING** until age 2. Accordingly, you will see this guidance reflected in these Child Usage Guidelines. Please review any applicable local or state laws related to child passenger safety before installing and using this Child Restraint.

Premature Infant Use

Before using this Child Restraint for preterm or low birth weight infants, ensure the Child Requirements are met and follow the guidelines in this section.

According to the National Highway Traffic Safety Administration (NHTSA), a properly installed Child Restraint reduces the risk of death by over 70% for infants involved in crashes. Federal Motor Vehicle Safety Standard (FMVSS) 213b establishes design and dynamic performance requirements for Child Restraint systems. However, the standard has no minimum weight limit and does not address the special medical needs of preterm or low birth weight infants.

To ensure that preterm and low birth weight infants are transported safely, the guidelines published by the American Academy of Pediatrics (AAP) in Pediatrics 2009;123:1424–1429 (reaffirmed June 2018) must be followed.

Preterm and low birth weight infants are at additional risk of breathing difficulties and heart problems when placed in a Child Restraint. CYBEX requires that the evaluation recommended by the AAP be conducted for all infants born earlier than 37 weeks and all newborn infants who weigh less than 5 lb (2.26 kg) at birth before their first car trip to check for breathing difficulties or heart rate problems when traveling in a **REAR-FACING** Child Restraint. Newborn infants should **NEVER** travel in a **FORWARD-FACING** Child Restraint.


The AAP recommends that appropriate hospital staff observe your infant in the Child Restraint for a period of 90 to 120 minutes or the duration of travel, whichever is longer. This period of observation must be performed with the infant properly positioned as described in these instructions and with the Child Restraint placed at an angle that is approved for use in the vehicle. The hospital staff will check for any breathing difficulties or heart rate problems. Your child's pediatrician will let you know if there are any special considerations for travel. The number of trips and the duration of time the infant is seated in the Child Restraint should be minimized. A caregiver should ride in the back seat to monitor the infant during travel.

You can learn more about the AAP's recommendations as well as other resources for parents and medical professionals at https://www.healthychildren.org/english/safety-prevention/on-the-go/Pages/default.aspx.

Child Requirements

Do not use this Child Restraint if your child does not meet all of these requirements:


- Weight is between 4 and 30 lb (1.8 and 13.6 kg)
- Height is less than 32 in (81 cm)
- Top of child's head is a minimum of 1 in (2.5 cm) below the top of the Infant Car Seat or Headrest, **WHICHEVER IS HIGHER.**

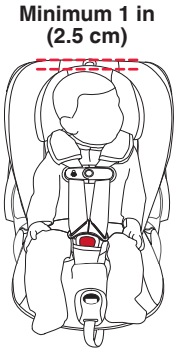

Once your child **EXCEEDS** any of the size requirements above, they **MUST DISCONTINUE** use of this Child Restraint.

After your child outgrows the CYBEX CLOUD G PRO, keep your child **REAR-FACING** in a convertible or all-in-one car seat as long as the seat allows, according to the manufacturer's specifications, before turning them around to ride **FORWARD-FACING**.

For proper use of the Infant Car Seat, the Harness Straps **MUST** be **AT OR JUST BELOW** your child's shoulders.



Regularly check for proper Harness height as your child grows.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **READ** this Owner's Manual carefully before first use and keep it for future reference.
- **FOLLOW ALL INSTRUCTIONS** on this Infant Car Seat and in the written instructions stored in the slot on the bottom of the seat shell.

AIRBAG WARNINGS



- **DO NOT** place a **REAR-FACING** Child Restraint on a front seat with an active airbag. **DEATH OR SERIOUS INJURY** can occur. The back seat is the safest place for children 12 and under.
- **DO NOT** use this Child Restraint in the front seat of a vehicle equipped with an air bag. Interaction between a **REAR-FACING** Child Restraint and air bags may cause death or serious injury. If your vehicle has an air bag, refer to the vehicle Owner's Manual for Child Restraint installation.
- **DO NOT** use this Child Restraint in a vehicle seating position equipped with a side air bag unless authorized by the vehicle manufacturer. Refer to vehicle Owner's Manual.
- **DO NOT** place any objects between the Child Restraint and the side air bag, as an expanding air bag may cause the items to strike your child.

GENERAL WARNINGS

- The primary protection for occupants of a vehicle in a collision is the structure of the vehicle itself.
- This Child Restraint will substantially improve the chances for survival in

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

most crashes if correctly used per the instructions and labeling.

- **NEVER** install or use this Child Restraint until you have read and understand the instructions in this manual, your vehicle Owner's Manual, and the labels on your Infant Car Seat.

  If there is a conflict between this manual and the vehicle Owner's Manual, contact CYBEX Consumer Services at 1-877-242-5676. Failure to follow these instructions can result in death or serious injury to your child in a crash.

- **DO NOT** allow others to install or use this Child Restraint unless they understand how to correctly install and use it.

- **NEVER** allow someone else to use this Child Restraint without also passing along this manual to them.

- **DO NOT** use a Child Restraint with an unknown history.

- **NEVER USE CHILD RESTRAINT IF IT HAS DAMAGED, BROKEN, OR MISSING PARTS.**

- **DO NOT** attempt to make repairs to or otherwise modify or tamper with this Child Restraint.

- **ALWAYS REPLACE THE CHILD RESTRAINT AFTER A CRASH OF ANY KIND, EVEN IF IT WAS UNOCCUPIED.** A crash can cause damage to the Child Restraint that may not be visible.

- **BEFORE** each use, **ALWAYS CHECK** that the Child Restraint is tightly secured in the vehicle seat and

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

does not move more than 1 in (2.5 cm) in any direction when checked at the Belt Path. If you cannot tightly secure the Child Restraint, try again or move it to another location.

- **ALWAYS** check Buckles and other parts for hot surfaces before placing your child in the Child Restraint. A hot surface could burn your child! Cover an unoccupied Child Restraint with a blanket when leaving it in a vehicle. The interior of a vehicle can become hot enough to burn a child even on a cloudy day.
- **NEVER** leave an empty Child Restraint unsecured in your vehicle. This Child Restraint must always be secured, even when not occupied. An unsecured Child Restraint could injure vehicle occupants in a sudden stop or crash.
- The Headrest on the vehicle seat that the child faces should be placed in the lowest position. Vehicle seats are regulated by Federal Motor Vehicle Safety Standards. The seat back that the child faces must not be altered in any way. **DO NOT** attach or hang additional items from the vehicle seat back that are not approved by the vehicle manufacturer. Items not tested with the vehicle seat could injure the child or interfere with car seat performance.

LOCATION WARNINGS

- **ACCORDING TO ACCIDENT STATISTICS,** children are safer when properly restrained in rear vehicle seating positions.
- **ONLY** place this Child Restraint in a vehicle seating location allowed by the vehicle manufacturer.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

To determine allowable seating positions, refer to your vehicle Owner's Manual for information about vehicle belt systems, air bags, side air bags, front passenger side air bags and Child Restraint installations.

- **NOT EVERY LOCATION WITHIN A VEHICLE MAY BE SAFE FOR THE INSTALLATION OF THIS CHILD RESTRAINT.** In fact, some vehicles have no seating position that is safe for the installation of this Child Restraint. Improper placement of this Child Restraint within a vehicle will increase the risk of death or serious injury.
- **DO NOT** use this Child Restraint in vehicles that do not have vehicle belts or lower anchors (pgs. 20-24).
- **ONLY** use this Child Restraint on **FORWARD-FACING** vehicle seats.
- **NEVER** install this Child Restraint in vehicle seats that face the rear or side of the vehicle.



- **NEVER** use this Child Restraint in a vehicle seating position where it cannot be secured tightly. A loosely installed Child Restraint will not protect your child in a crash.
- **ONLY** use this Child Restraint on vehicle seats with backs that lock into place. In the event of a sudden stop, an unlocked vehicle seat back could prevent this Child Restraint from protecting your child.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **NEVER** use this Child Restraint on boats, low speed vehicles (LSV), all-terrain vehicles (ATV), golf carts, or any other non-certified application.
- **ALWAYS USE** the Linear Side-Impact Protection (L.S.P.) Device when the Infant Car Seat is installed next to a vehicle door, either with or without the Base.
- **NEVER** extend the L.S.P. Device towards the interior of the vehicle, a passenger, another Child Restraint, or when the Child Restraint is placed in the rear middle seating position.
- **NEVER LIFT OR CARRY** the Child Restraint using the L.S.P. Device.

USAGE WARNINGS

- **ONLY USE** with children who weigh between 4 and 30 lb (1.8 and 13.6 kg) **AND** whose height is less than 32 in (81 cm).
- **DO NOT USE** this Child Restraint if the top of your child's head is less than 1 in (2.5 cm) from the top of the Headrest or Shell, **WHICHEVER IS HIGHER**.
- **ONLY USE** this Child Restraint **REAR-FACING**.
- **NEVER INSTALL** this Child Restraint in a vehicle when the carrier is in Full Recline Mode.
- **ALWAYS KEEP** your child properly secured in the Harness, especially when outside the vehicle in Full Recline Mode.
- When using this Child Restraint **REAR-FACING**, **DO NOT** loosen the vehicle belt to provide more leg room,

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

as this may keep the Child Restraint from protecting the child.

- Fold-down armrests could pose a hazard to a **REAR-FACING** child in certain types of collisions. Consult your vehicle Owner's Manual before installing any **REAR-FACING** car seat in front of a fold-down armrest.
- **SOME CHILDREN WITH ADAPTIVE TRANSPORTATION NEEDS**, such as preemies or those who have tested positive for positional apnea, may be at increased risk of suffering breathing or other difficulties in a Child Restraint. Please consult a physician to determine what type of Child Restraint should be used.
- **INFANTS MAY HAVE DIFFICULTY BREATHING WHEN IN AN UPRIGHT SEATED POSITION.** Make sure they recline enough for their head to lie back comfortably and safely. Failure to properly recline the Child Restraint could increase the child's risk of death or serious injury.
- **ALWAYS USE** the complete and buckled five-point Harness around your child.
- **ALWAYS CHECK** the Harness Buckle to make sure it is securely latched.
- Children have **STRANGLED** in loose or partially buckled Harness Straps. **FULLY RESTRAIN** the child even when the carrier is used outside the vehicle.
- **NEVER LEAVE** child unattended.
- **ALWAYS** have the Handle in a **LOCKED** position (pg. 30) while using this Child Restraint in a vehicle.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **ALWAYS** have the Handle **LOCKED** in the CARRY position when lifting by the Handle. Lifting from **ANY OTHER LOCKED** or **UNLOCKED** Position could cause the child to fall.
- If using this Child Restraint as the Infant Carrier and Base, **ALWAYS CHECK** to make sure the Infant Carrier is securely attached to the Base by **LIFTING UP** on the Handle.
- **BEFORE** each use, **ALWAYS CHECK** that the Child Restraint is tightly secured in the vehicle seat and does not move more than 1 in (2.5 cm) in any direction when checked at the Belt Path of the Base or Infant Car Seat, depending on your installation.
- **WHEN NOT IN USE,** securely store Rigid LATCH Connectors.
- When using Rigid LATCH, **ALWAYS CHECK** that both indicators are **GREEN**, indicating that the Rigid LATCH Connectors are secured to the vehicle anchors.
- **SUFFOCATION HAZARD:** Infant Car Seat can roll over on soft surfaces and suffocate child. **NEVER** place Infant Car Seat on beds, sofas, or other soft surfaces.
- **FALL HAZARD:** The Carrier can fall from the shopping cart. Do not use on shopping cart.



- **FALL HAZARD:** Child's activity can move Carrier. **NEVER** place Carrier on counter tops, tables, or any other elevated surfaces.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **ONLY USE** Infant Car Seat with strollers that are approved by CYBEX. Refer to the stroller Owner's Manual for details about how to attach the Infant Car Seat to your stroller. For a list of compatible strollers, please visit www.cybex-online.com.

LOAD LEG WARNINGS

- **NEVER** install in a seating position where the Load Leg, even in its shortest position, causes the Base to be pushed up above the vehicle seat. If necessary, install the Base with the Load Leg stored, in another seating position, or install the Infant Car Seat without the Base.
- Some vehicle manufacturers do not allow the use of Load Legs in all seating positions. **Please refer to your vehicle's Owner's Manual before installing the Base with the Load Leg.**
- **NEVER EXTEND** the Load Leg beyond the FIRST hole that will lock it firmly against the vehicle floor.
- **NEVER** install the Load Leg in a seating position that will not allow the leg to be extended in a **LOCKED** position with firm contact with the vehicle floor.
- **NEVER** use the Load Leg if the indicator won't turn **GREEN** when locked in position and touching the vehicle floor.
- **NEVER** place Load Leg on an uneven floor in the rear of the vehicle, it must always be placed flat on the vehicle floor.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **NEVER** use the Load Leg to recline the car seat. The recline adjustment foot on the Base is intended to recline the seat.
- **ALWAYS CHECK** to make sure the Load Leg is locked into the storage compartment in the Base when it is not in use.
- **NEVER** allow children to play with the Load Leg or the SafeLock Belt Tensioner (pgs. 27-28).

CHILD FIT WARNINGS

- **ALWAYS** keep your child properly secured in the Harness. A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.
- **SNUGLY ADJUST** the Harness provided with this Child Restraint around your child.
- **NEVER** use bulky clothing or blankets that will interfere with properly positioning or tightening the Harness.

ADDITIONAL WARNINGS

- **REGISTER** your Child Restraint with the manufacturer. This is the best way to reach you in the event of a recall.
- **NEVER USE** this Child Restraint when it is older than six (6) years. The date of manufacture can be found on a label affixed to the bottom of the Infant Car Seat, as well as on the Base.
- **DO NOT** allow children to play with this Child Restraint.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **DO NOT** allow children to play with vehicle belts. A child within reach of a seat belt may become entangled if he or she pulls the seat belt all the way out and wraps the belt around his or her head, neck, or waist.
- **NEVER USE** accessories or parts with this Child Restraint other than those approved by CYBEX. Use of accessories or parts from other manufacturers could alter the performance of the Child Restraint .
- **DO NOT** attach additional padding, toys, or other devices not made by CYBEX or described in these instructions for the Child Restraint. Items not tested with the Child Restraint could injure the child.

  Additional pads or pillows may interfere with the function of the Harness system, or cause breathing problems if the child's head falls forward, increasing the risk of serious injury or death.

SEAT BELT WARNINGS

- **ALWAYS** read your vehicle Owner's Manual to determine what vehicle belts and retractors are used in your vehicle.




- **DO NOT** use this Child Restraint with inflatable seat belts.
- **DO NOT** use in a seating position with door-mounted seat belts.



⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **DO NOT** use in a vehicle with seat belts that automatically move along the vehicle frame when the door is opened.



- **DO NOT** use with Lap/Shoulder Belts with two retractors. If the vehicle belts are not routed and fastened correctly, the Child Restraint may not protect the child in a crash.



- **DO NOT** use in a vehicle equipped with Lap Belts with ELRs (Emergency Locking Retractors that only lock during a sudden stop or crash).



You must use a seating location with a Lap/Shoulder Belt or locking Lap Belt.

Check your vehicle Owner's Manual to see if your Lap Belts have ELRs.

- **DO NOT** use on vehicle seats when both portions of the lap-only belt are positioned forward of the seat crease.




- Check your vehicle Owner's Manual to determine how to lock your seat belt for Child Restraint installation. The seat belt must be locked to properly secure the Child Restraint.
- **DO NOT** allow the vehicle belt release button to touch the Child Restraint. Accidental contact may cause the seat belt to release. If necessary, turn the seat belt release button away from the Child Restraint or move the Child Restraint to a different location.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.


If you have any of these four vehicle belt systems listed, they are **SAFE** to use to install your Child Restraint in the vehicle. **Review vehicle Owner's Manual for specific instructions on Child Restraint installation.**

Lap/Shoulder Belt with Locking Latch Plate




- The lap portion of this belt does not loosen once the belt is buckled.
- The vehicle belt is tightened by pulling up hard on Shoulder Belt and feeding the extra webbing into the retractor.

Lap Belt with Locking Latch Plate




- Once buckled, the vehicle belt is tightened by pulling on the free end of the strap.

Lap/Shoulder Belt with Sliding Latch Plate with Locking Retractor



- The latch plate slides freely along the Lap/Shoulder Belt. Vehicle belts with sliding latch plates are typically locked at the Shoulder Belt Retractor by buckling the belt and pulling all of the webbing out slowly to switch the retractor.
- The vehicle belt is tightened after switching the retractor by pulling up on Shoulder Belt and feeding the webbing into the retractor.

Lap Belt with Automatic Locking Retractor (ALR)



- The ALR does not allow the lap belt to get longer once it is buckled. The vehicle belt is tightened by feeding seat belt webbing into retractor.


⚠ WARNING! DEATH or SERIOUS INJURY can occur.

LOWER ANCHOR WARNINGS

LATCH (an acronym for **Lower Anchors and Tethers for Children**) refers to a pair of fixed Lower Anchors (or bars) and a Top Tether Anchor built into vehicles manufactured after September 1, 2002. Your vehicle Owner's Manual may also refer to this system as **ISOFIX, UAS** (Universal Anchorage System)**,** or **LUAS** (Lower Universal Anchorage System).

As shown at right, the Lower Anchors are located in the crease, or bight, between the vehicle seat back and seat cushion, and, if not visible, will typically be indicated by the symbol.

1. Vehicle Top Tether Anchors
2. Vehicle Seat Crease
3. Vehicle Lower Anchors

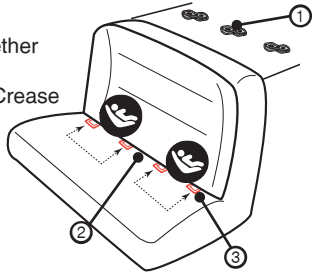

CYBEX allows this Child Restraint to be installed in Center Seating Positions using the two inner Lower Anchors from the outboard seating positions if t your vehicle manufacturer allows it **AND** the distance between them is exactly 11 in (28 cm). When using the inner Lower Anchors make sure there are no obstructions for the installation.


If distance is not correct and/or not allowed by vehicle manufacturer, use the vehicle belt for installation in the center position.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

This Child Restraint can be safely installed using either **LATCH** or vehicle belts and meets the requirements of FMVSS 213b with either installation method. Both methods are safe for your child when installed correctly


- The **LATCH** system is intended to be used **ONLY** as described in these instructions. Refer to your vehicle Owner's Manual for lower anchor bar positions in your vehicle.
- In addition to these instructions, read and follow your vehicle Owner's Manual regarding installation of the Child Restraint and **LATCH**. If there is a discrepancy, follow your vehicle Owner's Manual.
- **DO NOT** install this Child Restraint with **LATCH** and the vehicle's seat belts at the same time.
- **ONLY** use for securing Child Restraint to vehicle lower anchor bars.
- **NEVER** attach two **LATCH** Connectors to one vehicle lower anchor bar.
- **ALWAYS** be sure that **LATCH** is attached to the vehicle lower anchor bars by pulling hard on the Lower Anchor Connectors. If they are not attached, the Lower Anchor Connector assembly will not secure your Child Restraint. **DEATH or SERIOUS INJURY can occur.**

1. Carry Handle
2. Seat Cover
3. Headrest
4. Lap Belt Guides
5. Infant Insert (Optional)
6. Harness Adjustment Button
7. Harness Adjustment Strap
8. L.S.P. Device (deployed)
9. Shoulder Pads (removable)
10. SensorSafe Chest Clip
11. Harness Straps
12. Harness Buckle Release Button
13. Buckle Pad

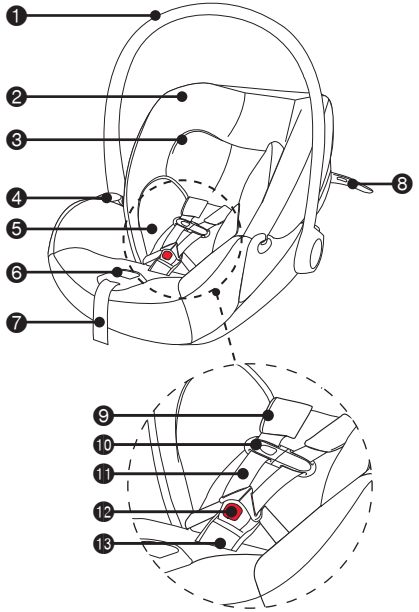


Overview of the CLOUD G PRO Infant Car Seat and Base


14. No-Rethread Harness Adjuster Handle
15. Canopy (stored)
16. Recline Release Handle
17. Shoulder Belt Guide
18. Base/Stroller Release Handle
19. Owner's Manual (stored)
20. Travel System Attachment Slot
21. Carry Handle Adjustment Button (2)
22. L.S.P. Device (stored)
23. Canopy (deployed)

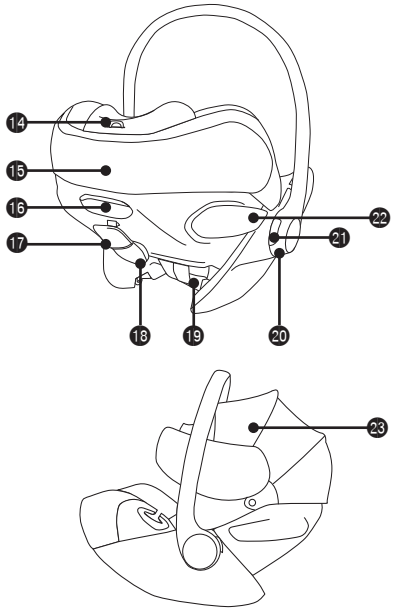

24. Integrated Anti-Rebound
25. Load Leg Indicator (upper)
26. Load Leg (extended)
27. Load Leg Indicator (lower)
28. Base Belt Path Opening (2)
29. SafeLock Belt Tensioner
30. Belt Guides
31. Recline Foot Adjustment Handle
32. Recline Indicator
33. Rigid LATCH Adjustment Button and Indicator
34. Rigid LATCH Connector

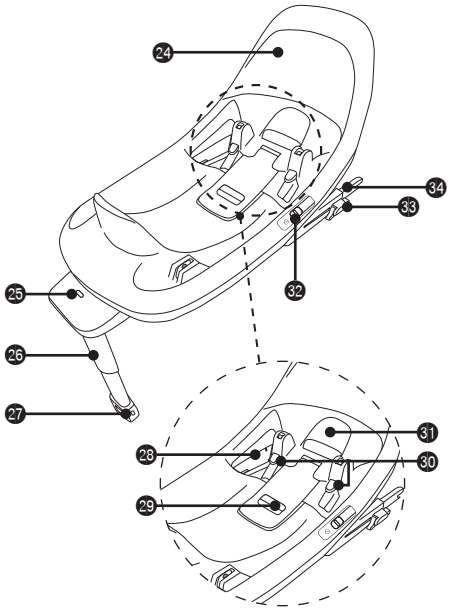

35. Load Leg (stored)
36. Load Leg Release Button
37. Load Leg foot
38. Recline Foot (stored)
39. Rigid LATCH Release

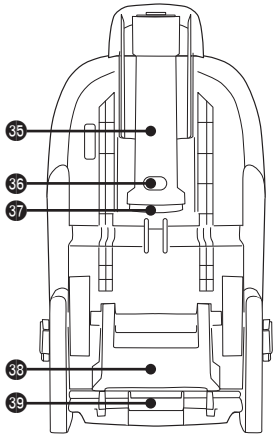


⚠ WARNING! DEATH or SERIOUS INJURY can occur.

The CYBEX CLOUD G PRO Full Recline Backrest must **ONLY** be used outside of the vehicle. **NEVER INSTALL** this Child Restraint in a vehicle with the carrier in Full Recline Mode.

The CLOUD G PRO Full Recline Backrest can be easily operated with one hand without loosening the Harness or having to take the child out of the carrier, and the extended leg rest allows the child to lie comfortably in an ergonomically correct position while the handle remains in the carrying position for easier mobility. The CYBEX CLOUD G PRO Full Recline Backrest is compatible with all CYBEX strollers.

To Enter Full Recline Mode:

With one hand on the Carry Handle, squeeze the Recline Release Handle and push the seat back down until it locks into the Full Recline position.




To Return to Car Seat Mode:

Squeeze the Recline Release Handle and lift the seat back up until it locks into the upright position.


⚠ WARNING! DEATH or SERIOUS INJURY can occur.

ALWAYS have the Handle in one of the four **LOCKED** position while using this Child Restraint in a vehicle.

1. Carry
2. Intermediate
3. Intermediate
4. Resting

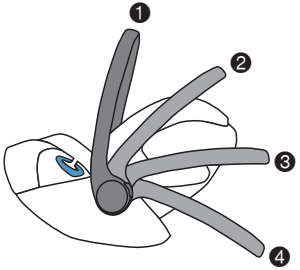



To rotate the Handle, squeeze BOTH Handle Adjustment Buttons Ⓐ at the same time while moving the Handle Ⓑ between positions.

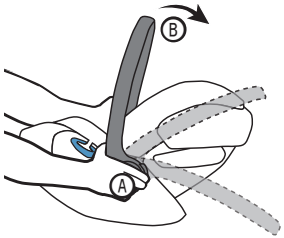

Harness Adjustment

Loosen Harness by firmly pressing down the Harness Adjustment Button Ⓐ while pulling forward on both straps Ⓑ at shoulder level. Pull the Adjuster Strap Ⓒ to tighten the Shoulder Straps.

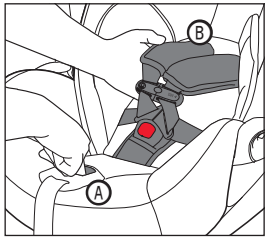





Harness Buckle

To release Buckle Tongues, firmly press the red button on the Harness Buckle and pull the tongues out.

To fasten, insert each Tongue into Buckle, listening for an audible **CLICK**. Pull on each to verify a secure connection.


Check that the Buckle functions properly and is kept free of dirt and debris. For cleaning, see pg. 77.






Integrated Anti-Rebound

The CLOUD G PRO Infant Car Seat Base is designed with an Integrated Anti-Rebound feature that provides additional protection in the event of a crash by reducing car seat rotation toward the back of the vehicle.

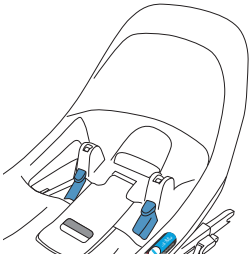


Integrated XXL Canopy

The Integrated XXL Canopy has four positions. Simply pull forward to extend and gently push back to retract the Canopy into its original position.



⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **ALWAYS USE** the L.S.P. Device when the Infant Car Seat is installed next to a vehicle door or panel, either with or without the Base. **Never** extend the L.S.P. towards the interior of the vehicle, a passenger, another Child Restraint, or when the Child Restraint is placed in the rear middle seating position.
- **NEVER LIFT OR CARRY** the Child Restraint using the L.S.P. Device.



The L.S.P. System is built into the CLOUD G PRO. This system enhances the safety of your child in the event of certain side crashes.


To Extend the L.S.P. Device:

Pull out the L.S.P. Device as far as possible towards the car door or panel closest to the Infant Car Seat.



To Retract the L.S.P. Device:

Depress the button, push the L.S.P. Device back into the carrier, and listen for an audible **CLICK.**




The CLOUD G PRO Base is equipped with a Load Leg that helps minimize crash forces on a child in a frontal crash. The Load Leg is an effective safety feature of the Base when used properly, and **USING IT IS STRONGLY RECOMMENDED.**

If all installation requirements for the Load Leg cannot be met, you **MUST** choose another seating position, use the Base with the Load Leg stored (see below), or install without the Base. Consult the vehicle Owner's Manual and the Load Leg Warnings on pgs.18-19 of this manual.

Removing the Load Leg from Storage

Turn Base over and pull Load Leg out as shown. The Load Leg Indicator (pg. 27) will turn **GREEN** when fully open.

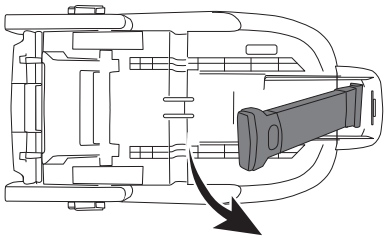

Storing the Load Leg


When not in use, Load Leg should be stored under Base to prevent damage.

To store Load Leg, retract Load Leg foot until fully closed, rotate Load Leg toward underside of Base, and press tab on back of Load Leg foot into slot in storage location to lock in place.

The CYBEX CLOUD G PRO Infant Car Seat has a Headrest that automatically adjusts Harness height without needing to undo and rethread the Harness. Using the No-Rethread Harness, the Headrest may be adjusted up and down through 11 positions to fit your child.

To Adjust the Headrest:

1. Loosen Harness by firmly pressing down on Harness Adjustment Button while pulling forward on both Harness Straps at shoulder level.
2. Unbuckle Harness and Chest Clip, then drape Harness over sides of Child Restraint.
3. Place child in restraint, making sure their back and bottom are flush with the restraint and the Buckle Strap is snug against the child, but NOT under the child's bottom.
4. Unlock the Headrest by pulling up on the Headrest Height Adjustment Handle. (A)
5. Adjust the Harness by sliding the Headrest up or down.

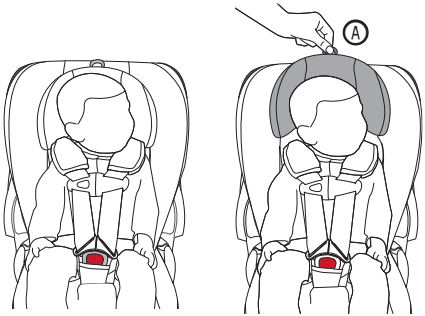


For proper use of the Infant Car Seat, the Harness Straps **MUST** be **AT OR JUST BELOW** your child's shoulders (see pg. 10).


Product Features
Rigid LATCH

Rigid LATCH is a LATCH system that connects directly from the Infant Car Seat Base to the vehicle lower anchors with no LATCH straps. Rigid LATCH ships already locked into the Base Recline Foot (see below).


To Remove Rigid LATCH from storage, rotate 180° Ⓐ, then lock into Base Recline Foot Ⓑ.

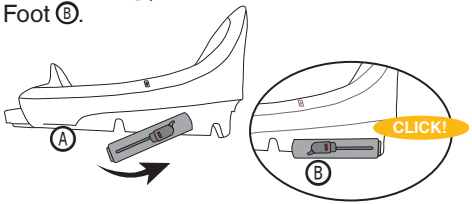


To Extend or Retract Rigid LATCH, press the buttons on both sides of the Rigid LATCH and slide the LATCH Connectors out or in as needed.




To Return Rigid LATCH to storage, turn the Base upside down, pull the lever Ⓒ, and rotate Rigid LATCH 180° back into storage Ⓓ.



Rigid LATCH is equipped with red/green indicators that turn **GREEN** when the LATCH Connectors are attached to the vehicle anchors.



The CYBEX CLOUD G PRO is equipped with a SensorSafe Chest Clip that works with the CYBEX Mobile App, which is available for download at the Apple App Store® or on Google Play™.*



The CYBEX Mobile App provides the following to your smartphone:


- A reminder that your child is still in the vehicle
- An alert if the Chest Clip is opened while driving
- The current temperature of your vehicle interior
- Owner's Manuals for CYBEX Child Restraints
- Contact information for CYBEX Consumer Services

See the CYBEX SensorSafe Mobile App User Guide included with this product or contact CYBEX Consumer Services at 1-877-242-5676


* Trademarks are the property of their respective owners.

To separate the SensorSafe Chest Clip, push button and pull apart.

To fasten, slide the two pieces together until an audible **CLICK** is heard.




Always position the center of the SensorSafe Chest Clip even with the child's armpits.



Shoulder Pads and Infant Insert


The Shoulder Pads are optional and may be used for added comfort. Wrap Shoulder Pads around Harness Straps and snap closed as shown.

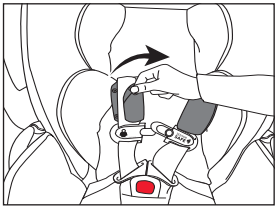


Always check that the Shoulder Pads **DO NOT** bunch up when tightening the Harness or prevent the Chest Clip from being positioned even with the child's armpits.

The Infant Insert will help provide a better Harness fit for smaller babies, as well as stability for the torso.

We recommend using the Infant Insert until the child weighs about 11 lbs (5 kg) or about 3 months. When installed, the Insert should be flush with the Buckle as shown.



When used with a smaller child, the Infant Insert Side Wings can be folded and tucked in for better support of the child and to help with proper fit when securing the child (pgs. 66-70).



Infant Insert with Side Wings folded and tucked in


Installing with Base Using Rigid LATCH (Recommended Installation)

1. Ensure Load Leg (pg. 34) and Rigid LATCH (pg. 36) are both removed from storage and positioned for use.


   If all installation requirements for the Load Leg cannot be met, you **MUST** choose another seating position, use the Base with the Load Leg stored, or install without the Base. Consult the vehicle Owner's Manual and the Load Leg Warnings on pgs. 18-19 of this manual.

2. Make sure the vehicle is on level ground and place the Base in an approved vehicle seating location.


3. Adjust the Recline Foot to achieve the correct angle for your child's weight as shown on the Recline Indicator.



②



③

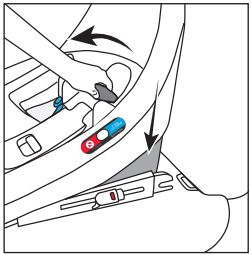


4. Press the two buttons on both sides of the Rigid LATCH and fully extend the LATCH Connectors.
5. While holding Rigid LATCH, attach both connectors to the vehicle lower anchors. Each should make an audible **CLICK** when attached. Make sure they are attached by pulling firmly on the connectors.


If, after adjusting the Recline Foot in step 3, you are unable to connect Rigid LATCH to the lower anchors (steps 4-5), perform steps 4 and 5 FIRST. Then follow step 3 to adjust the Recline Foot.

A **GREEN** indicator will be visible on the release button when the Rigid LATCH Connectors are attached to the lower anchors.


④



⑤

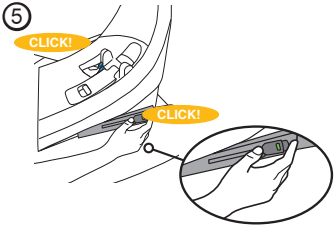

For installations where vehicle lower anchors may be difficult to reach, you may obtain LATCH Guides by calling CYBEX Consumer Services at 1-877-242-5676.




6. Push the Base until it rests flat against the vehicle seat back.
7. Grab the Base at the Belt Path Ⓐ and pull from side to side and front to back to make sure it is installed correctly. The Base should not move more than 1 in (2.5 cm) in any direction.

   To achieve a tighter fit with Rigid LATCH, you may need to snug the Base against the seat back by "walking" the Base further into position.


   To do this, place one hand on the front of the Base Ⓑ and push toward the vehicle center until you hear a **CLICK**, then pull toward the vehicle door until you hear a second **CLICK**, repeating as needed until tight.

   If the Base moves too much, you may need to try a different vehicle seat location or installation method, or both.

⑥



⑦

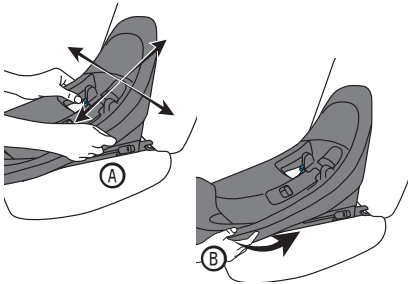

8. Press the Load Leg Release Button and extend it until the Foot makes firm contact with vehicle floor. Lock Leg into place using the first hole that will firmly lock it against the vehicle floor.

   It may be necessary to lift up slightly on the Base to allow the Leg to lock into the hole.


9. Place Infant Car Seat into Base and listen for a **CLICK**. Check that Car Seat is installed by lifting up on the Handle.

10. Check that the Recline Angle remains in the appropriate range for the child's weight (pg. 39). If not:

    - Uninstall Base, adjust Recline Foot, and reinstall, or
    - Fully store Recline Foot and use a tightly rolled towel or pool noodle under the Base, near the vehicle seat back.


11. Check that the L.S.P. System (pg. 33) is being properly used.

8

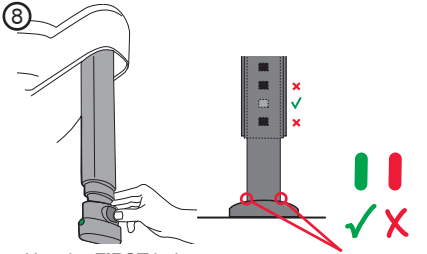

Use the **FIRST** hole that will lock the Load Leg foot firmly against vehicle floor.

10

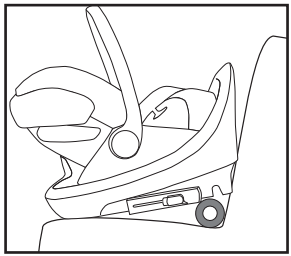


⚠ WARNING! DEATH or SERIOUS INJURY can occur.


NEVER install this Child Restraint using a non-locking vehicle Lap/Shoulder Belt. A locking clip must be used with a vehicle belt that **DOES NOT LOCK**. Call CYBEX Consumer Services at 1-877-242-5676 to obtain a locking clip.


1. Ensure Load Leg (pg. 34) is removed from storage and positioned for use.

   If all installation requirements for the Load Leg cannot be met, you **MUST** choose another seating position, use the Base with the Load Leg stored, or install without the Base. Consult the vehicle Owner's Manual and the Load Leg Warnings on pgs. 18-19 of this manual.
2. Store Rigid LATCH as shown on pg. 36.
3. Make sure the vehicle is on level ground and place the Base in an approved vehicle seating location.

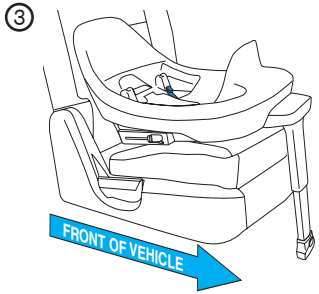


4. Adjust the Recline Foot to achieve the correct angle for your child's weight as shown on the Recline Indicator.



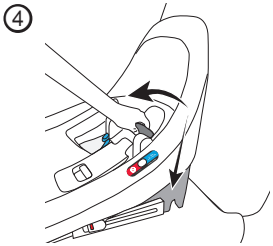

5. While pushing down on the SafeLock Belt Tensioner Ⓐ, squeeze the gray button Ⓑ toward the rear of the seat, then lift the Belt Tensioner to open.

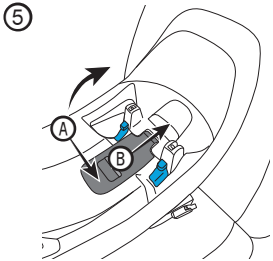


6. Route the **LAP** and **SHOULDER PORTIONS** of the vehicle belt through Base Belt Path Opening, under the SafeLock Belt Tensioner, under the tabs on the blue Belt Guides, and through other Base Belt Path Opening. **BUCKLE THE BELT.**

   Make sure the belts lie flat and are not twisted. The vehicle belt should **ALWAYS** be routed **UNDER** the SafeLock Belt Tensioner and the tabs on the Belt Guides.

   NEVER place a vehicle belt over the SafeLock Belt Tensioner or the tabs on the Belt Guides, even in a vehicle with longer buckle stalks.


   Make sure that vehicle belt buckle and hardware do not interfere with correct installation of the Base or with the connection of the Infant Car Seat to the Base.

⑥

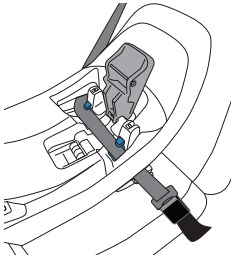


7. On the Buckle side, first lift up on the **SHOULDER PORTION** of the vehicle belt to remove slack in the **LAP PORTION** Ⓐ.

   Then, from the opposite side, remove slack from the **SHOULDER PORTION** Ⓑ. Be careful not to over tighten. The SafeLock Belt Tensioner will tighten the system fully.

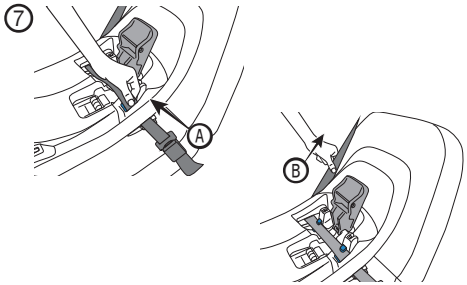

8. Press down on SafeLock Belt Tensioner until it locks into place. If Belt Tensioner does not lock, try loosening the vehicle belt slightly, then try to close again.

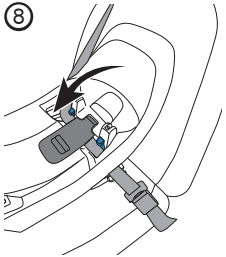


9. Grab the Base at the Belt Path and pull from side to side and front to back to make sure it is installed correctly. The Base should not move more than 1 in (2.5 cm) in any direction.


10. Lock your vehicle Lap/Shoulder Belt. Refer to your vehicle Owner's Manual for how your vehicle Lap/Shoulder Belt locks. In many vehicles, you can switch the Shoulder Belt retractor into locking mode by pulling the Shoulder Belt out all the way. In some vehicles the buckle locks. Check the vehicle Owner's Manual to see how your system locks.

    To check if the vehicle belt is locked, after you install the Base, pull up firmly on the **LAP PORTION** of the belt between the Base Belt Path Openings. The belt should remain tight if the vehicle system is locked.

⑨

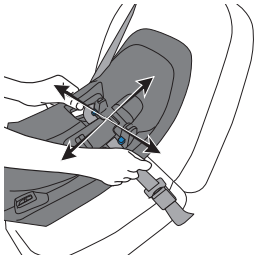

⑩

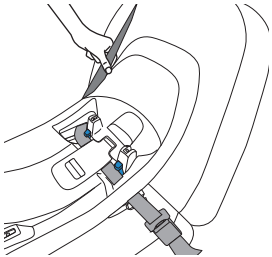

11. Press the Load Leg Release Button and extend it until the Foot makes firm contact with vehicle floor. Lock Leg into place using the first hole that will firmly lock it against the vehicle floor.

    It may be necessary to lift up slightly on the Base to allow the Leg to lock into the hole.


12. Place Infant Car Seat into Base and listen for a **CLICK**. Check that Car Seat is installed by lifting up on the Handle.

13. Check that the Recline Angle remains in the appropriate range for the child's weight (pg. 44). If not:

    - Uninstall Base, adjust Recline Foot, and reinstall, or
    - Fully store Recline Foot and use a tightly rolled towel or pool noodle under the Base, near the vehicle seat back.


14. Check that the L.S.P. System (pg. 33) is being properly used.

11

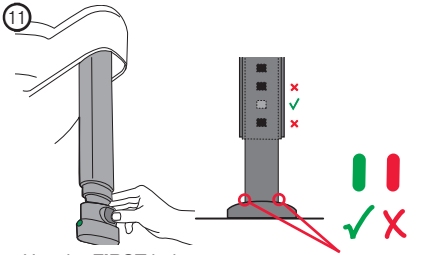

Use the **FIRST** hole that will lock the Load Leg foot firmly against vehicle floor.

13

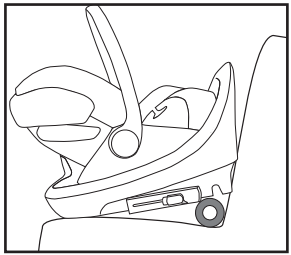


1. Ensure Load Leg (pg. 34) is removed from storage and positioned for use.


   If all installation requirements for the Load Leg cannot be met, you **MUST** choose another seating position, use the Base with the Load Leg stored, or install without the Base. Consult the vehicle Owner's Manual and the Load Leg Warnings on pgs. 18-19 of this manual.
2. Store Rigid LATCH as shown on pg. 36.
3. Make sure the vehicle is on level ground and place the Base in an approved vehicle seating location.
4. Adjust the Recline Foot to achieve the correct angle for your child's weight as shown on the Recline Indicator.



①

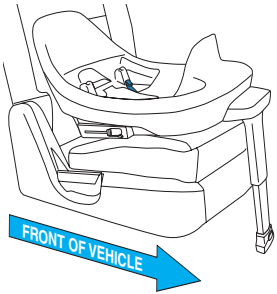

④




5. While pushing down on the SafeLock Belt Tensioner Ⓐ, squeeze the gray button Ⓑ toward the rear of the seat, then lift the Belt Tensioner to open.
6. Route vehicle **LAP BELT** through Base Belt Path Opening, under the SafeLock Belt Tensioner, under the tabs on the blue Belt Guides, and through the other Base Belt Path Opening. **BUCKLE THE BELT.**

   Make sure the **LAP BELT** lays flat and is not twisted. The vehicle belt should **ALWAYS** be routed **UNDER** the SafeLock Belt Tensioner and the tabs on the Belt Guides.


   NEVER place a vehicle belt over the SafeLock Belt Tensioner or the tabs on the Belt Guides, even in a vehicle with longer buckle stalks.

   Make sure that vehicle belt buckle and hardware do not interfere with correct installation of the Base or with the connection of the Infant Car Seat to the Base.

⑤

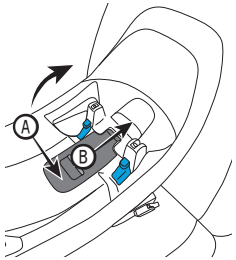


⑥



7. On the Buckle side, remove slack from the **LAP BELT**, being careful not to over tighten. The SafeLock Belt Tensioner will tighten the system fully.

   After removing slack, secure the free end of the Lap Belt under the SafeLock Belt Tensioner.

⑦

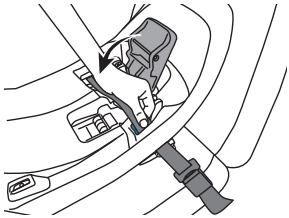


8. Press down on SafeLock Belt Tensioner until it locks into place. If Belt Tensioner does not lock, try loosening the vehicle belt slightly, then try to close again.

⑧




9. Grab the Base at the Belt Path and pull from side to side and front to back to make sure it is installed correctly. The Base should not move more than 1 in (2.5 cm) in any direction.
   If the Base moves too much, open the SafeLock Belt Tensioner and remove a little more slack from the vehicle belt, then close and recheck. If the Base still moves too much, you may need to try a different vehicle seat location, installation method, or both.
10. Press the Load Leg Release Button and extend it until the Foot makes firm contact with vehicle floor. Lock Leg into place using the first hole that will firmly lock it against the vehicle floor.

    It may be necessary to lift up slightly on the Base to allow the Leg to lock into the hole.
11. Place Infant Car Seat into Base and listen for a **CLICK**. Check that Car Seat is installed by lifting up on the Handle.

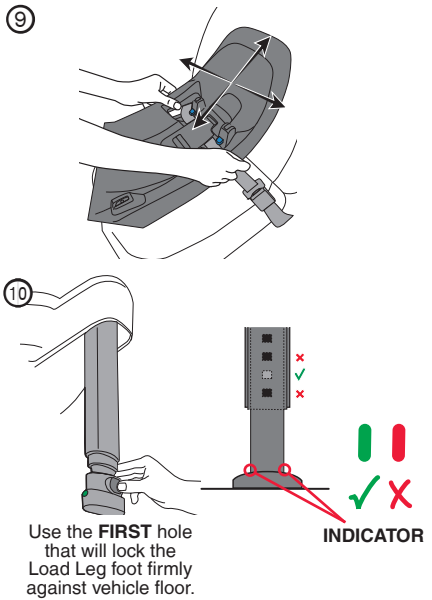

12. Check that the Recline Angle remains in the appropriate range for the child's weight (pg. 49). If not:
    - Uninstall Base, adjust Recline Foot, and reinstall, or
    - Fully store Recline Foot and use a tightly rolled towel or pool noodle under the Base, near the vehicle seat back.
13. Check that the L.S.P. System (pg. 33) is being properly used.

(12)

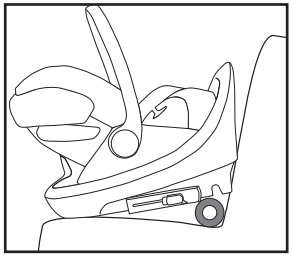


Installing without Base Using Lap/Shoulder Belts (Preferred Method)

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **NEVER** install this Child Restraint using a non-locking vehicle Lap/Shoulder Belt. A locking clip must be used with a vehicle belt that **DOES NOT LOCK.** Call **CYBEX Consumer Services at 1-877-242-5676** to obtain a locking clip.
- **ALWAYS** have the handle **LOCKED** while using this Child Restraint in a vehicle.
- **NEVER** recline back rest when using carrier in vehicle.
- **NEVER INSTALL** the Infant Car Seat with both the **LAP** and **Shoulder PORTION**S of the vehicle belt routed through the Lap Belt Guides.

1. Make sure the vehicle is on level ground and position the Infant Car Seat firmly against the back of the rear vehicle seat.

2. Route the **LAP PORTION** of the vehicle belt through the Lap Belt Guides and **BUCKLE THE BELT**.

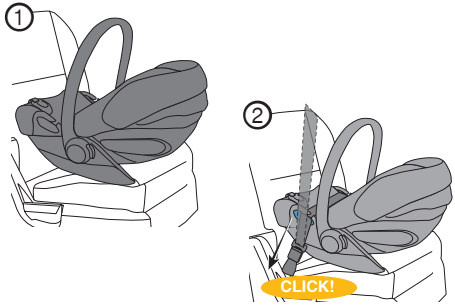

3. Lift the **SHOULDER PORTION** of the vehicle belt over the handle and around the Infant Car Seat. Slide into blue Shoulder Belt Guide Ⓐ.


   Ensure that the Shoulder Belt is routed below the L.S.P. Device in either the extended or retracted position.

4. Lock your vehicle Lap/Shoulder Belt. Refer to your vehicle Owner's Manual for how your vehicle Lap/Shoulder Belt locks.


   In many vehicles, you can switch the Shoulder Belt retractor into locking mode by pulling the Shoulder Belt out all the way. In some vehicles the buckle locks. Check the vehicle Owner's Manual to see how your system locks.

   To check if the vehicle belt is locked, after you install the Infant Car Seat, pull up firmly on the **LAP PORTION** of the belt between the Lap Belt Guides. The belt should remain tight if the vehicle system is locked.

③




④




5. Push Infant Car Seat firmly into vehicle seat, pressing down near the Buckle Strap between the child's legs Ⓐ while removing slack from Lap Belt Ⓑ. Repeat for Shoulder Belt.

⑤



6. Make sure that vehicle belt buckle and hardware **DO NOT INTERFERE** with the Infant Car Seat.

⑥




7. Check the recline angle. Adjust the seat angle until the **BLUE LEVEL LINE** on the Infant Car Seat is level with the ground.

   If necessary, a tightly rolled towel or pool noodle may be placed under the Infant Car Seat, near the vehicle seat back, to adjust the angle (pg. 65).


8. Grab the Infant Car Seat at the Lap Belt Guides and pull from side to side and front to back to make sure it is installed correctly. The Infant Car Seat should not move more than 1 in (2.5 cm) in any direction.

   If the Infant Car Seat moves too much, tighten the vehicle belts more and recheck. You may try a different vehicle seat or installation method, or both.

9. Check that the L.S.P. System (pg. 33) is being properly used.

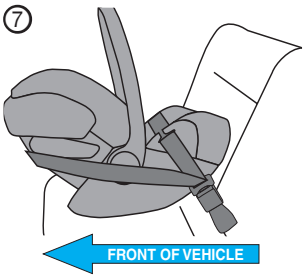

Blue level line MUST be parallel to ground when seat is installed in vehicle without base.

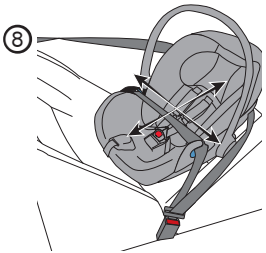


Installing without Base Using Lap/Shoulder Belts (Alternate Method)

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **NEVER** install this Child Restraint using a non-locking vehicle Lap/Shoulder Belt. A locking clip must be used with a vehicle belt that **DOES NOT LOCK.** Call **CYBEX Consumer Services at 1-877-242-5676** to obtain a locking clip.
- **ALWAYS** have the handle **LOCKED** while using this Child Restraint in a vehicle.
- **NEVER** recline back rest when using carrier in vehicle.
- **NEVER INSTALL** the Infant Car Seat with both the **LAP** and **Shoulder PORTION**S of the vehicle belt routed through the Lap Belt Guides.

Use this alternate method **ONLY** when the preferred method on pgs. 54-57 does not work with your vehicle Lap/Shoulder belts.

1. Make sure the vehicle is on level ground and position the Infant Car Seat firmly against the back of the rear vehicle seat.
2. Route **LAP PORTION** of vehicle belt through blue **LAP BELT GUIDES** and **BUCKLE THE BELT.** Then route **SHOULDER PORTION** diagonally across vehicle seat back as shown.

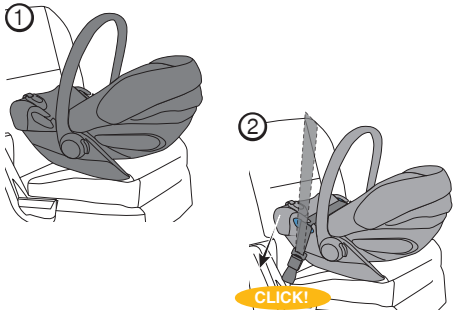

3. Lock your vehicle Lap/Shoulder Belt. Refer to your vehicle Owner's Manual for how your vehicle Lap/Shoulder Belt locks.


   In many vehicles, you can switch the Shoulder Belt Retractor into locking mode by pulling the Shoulder Belt out all the way. In some vehicles the buckle locks. Check the vehicle Owner's Manual to see how your system locks.

   To check if the vehicle belt is locked, after you install the Infant Car Seat, pull up firmly on the **LAP PORTION** of the belt between the Lap Belt Guides. The belt should remain tight if the vehicle system is locked.


4. Push Infant Car Seat firmly into vehicle seat, pressing down near the child's legs Ⓐ, while pulling up on the **SHOULDER PORTION** of the vehicle belt Ⓑ to remove slack from the **LAP PORTION**.

5. Make sure that vehicle belt buckle and hardware do not interfere with the Infant Car Seat.

④

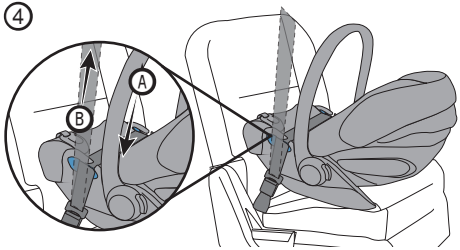

⑤



6. Check the recline angle. Adjust the seat angle until the **BLUE LEVEL LINE** on the Infant Car Seat is level with the ground.


   If necessary, a tightly rolled towel or pool noodle may be placed under the Infant Car Seat, near the vehicle seat back, to adjust the angle (pg. 65).

7. Grab the Infant Car Seat at the Lap Belt Guides and pull from side to side and front to back to make sure it is installed correctly. The Infant Car Seat should not move more than 1 in (2.5 cm) in any direction.

8. If the Infant Car Seat moves too much, tighten the vehicle belts more and recheck. You may try a different vehicle seat or installation method, or both.


9. Check that the L.S.P. System (pg. 33) is being properly used.

⑥



Blue level line MUST be parallel to ground when seat is installed in vehicle without base.

⑦



⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **ALWAYS** have the handle **LOCKED** while using this Child Restraint in a vehicle.
- **NEVER** recline back rest when using carrier in vehicle.

1. Make sure the vehicle is on level ground and position the Infant Car Seat firmly against the back of the rear vehicle seat.



2. Route the vehicle **LAP BELT** through the Lap Belt Guides and **BUCKLE THE BELT**.
3. Push Infant Car Seat firmly into vehicle seat, pressing down near the Buckle Strap between the child's legs, while removing slack from the **LAP BELT.**

   If necessary, tuck the loose end of the **LAP BELT** out of the way.



4. Check the recline angle. Adjust the seat angle until the **BLUE LEVEL LINE** on the Infant Car Seat is level with the ground.


   If necessary, a tightly rolled towel or pool noodle may be placed under the Infant Car Seat, near the vehicle seat back, to adjust the angle (pg. 65).

5. Grab the Infant Car Seat at the Lap Belt Guides and pull from side to side and front to back to make sure it is installed correctly. The Infant Car Seat should not move more than 1 in (2.5 cm) in any direction.

   If the Infant Car Seat moves too much, tighten the vehicle belts more and recheck. You may try a different vehicle seat or installation method, or both.


6. Check that the L.S.P. System (pg. 33) is being properly used.

④



Blue level line MUST be parallel to ground when seat is installed in vehicle without base.

⑤

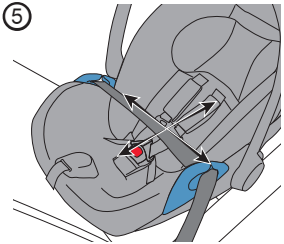


⚠ WARNING! DEATH or SERIOUS INJURY can occur.

ALWAYS have the Handle **LOCKED** in the CARRY position when lifting by the Handle. Lifting from **ANY OTHER LOCKED** or **UNLOCKED** Position could cause the child to fall.

Attaching the Infant Car Seat to the Base

1. **LOCK** the Handle in the CARRY position.
2. Lift the Infant Car Seat by the Handle and install it onto the Base.

   You will hear an audible **CLICK**.
3. Lift up on the Infant Car Seat to ensure it is secured to the Base.

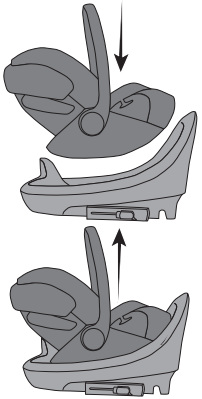


Removing the Infant Car Seat from the Base

1. If used, retract the L.S.P. Device (pg. 33).



2. Pull the Base/Stroller Release Handle and lift the Infant Car Seat off the Base.




⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- It is very important for your child's safety that this Child Restraint be installed at the correct recline angle. Failure to properly recline the Child Restraint on the vehicle seat increases the risk of **DEATH OR SERIOUS INJURY**.
- **DO NOT** use this or any other Child Restraint with a premature, low birth weight, or medically fragile infant, until after you have consulted with your doctor. Some infants may have difficulty breathing or have other medical problems when placed in a seated position.
- If the Child Restraint is **TOO UPRIGHT**, the child's head may fall forward and cause breathing problems. If the Child Restraint is **TOO RECLINED** crash protection will be reduced.


Infant Car Seat with Base

1. Before attaching Infant Car Seat to Base, adjust Recline Foot until indication line is in **BLUE** zone on Recline Indicator.

   The **BLUE** zone is for all children 4-30 lb (1.8-13.6 kg).Vehicle must be on a level surface for Recline Indicator to function correctly.




2. Pull Recline Foot Adjustment Handle, then extend or retract Recline Foot until Recline Indicator is in the **BLUE** zone. There are four recline positions.



3. Release Recline Foot Adjustment Handle to lock Recline Foot in place.
4. Install Base using one of the methods on pgs. 39-53. Be sure to check for correct Recline Angle <u>after</u> installation.
5. Secure the child (pg. 66) and recheck that the Recline Angle remains in the appropriate range for the weight of the child. If not:
   - Uninstall Base, adjust Recline Foot, and reinstall, or
   - Fully store Recline Foot and use a tightly rolled towel or pool noodle under the Base, near the vehicle seat back.

<u>Infant Car Seat Only</u>

Adjust the seat angle until the **BLUE LEVEL LINE** on the Infant Car Seat is level with the ground. If you are having trouble achieving the proper recline angle:

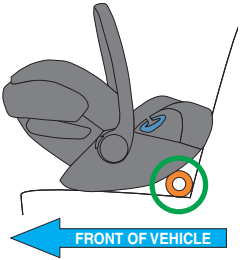


Blue level line MUST be parallel to ground when seat is installed in vehicle without base.

- Uninstall Infant Car Seat.
- Place a tightly rolled towel or pool noodle under the Infant Car Seat, near the vehicle seat back, as indicated by the green circle.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **ALWAYS** check the Harness Buckle to make sure it is securely latched. Failure to fasten and tighten the Harness system correctly with each use can result in **DEATH** or **SERIOUS INJURY**.
- **DO NOT** use Child Restraint if Buckle Tongues **DO NOT CLICK** into the Buckle. Please call CYBEX Consumer Services before using the Child Restraint.
- In cold weather, **DO NOT** dress the child in bulky clothing like snowsuits when riding in a Car Seat. Bulky clothing makes it difficult to properly tighten the Harness to the child, which may allow the child to be ejected from the Child Restraint during a crash. If necessary, place a blanket over the Harnessed child without interfering with the Harness system.


1. Loosen Harness by firmly pressing down on the Harness Adjustment Button Ⓐ while pulling forward on both straps at shoulder level Ⓑ. Then press red button Ⓒ on Harness Buckle to release Tongues.

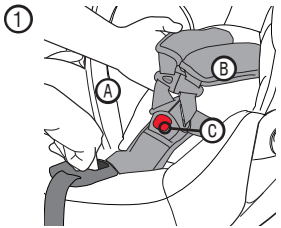


2. Separate Chest Clip Ⓓ and hook the Harness Buckle Tongues over the Lap Belt Guides Ⓔ to allow for easier placement of child in the seat.
3. Place child in Infant Car Seat in seated position, making sure their bottom is in the seat and their back is fully supported.
4. Pull Harness Straps over each arm onto shoulders and around the hips. Make sure Buckle Pad and Harness Buckle are between the legs.
5. Adjust the Headrest.

   IMPORTANT: MAKE SURE Harness Straps are **AT OR JUST BELOW** child's shoulders.


②



④




⑤




6. Buckle by inserting one Tongue at a time into the Harness Buckle, listening for an audible **CLICK** with each one. Make sure Harness Straps are not twisted.

⑥

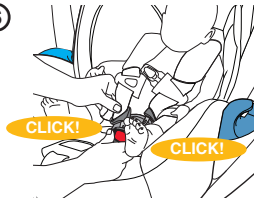


7. Connect the Chest Clip listening for an audible **CLICK.**

⑦




8. Pull up on Harness Straps to snug around the child's hips while holding the Harness Buckle in place.

⑧



9. Slowly pull the Adjuster Strap to tighten the Shoulder Straps. A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.


   If, after removing slack, there is still a gap between the child and the Buckle Strap, place a tightly rolled washcloth in the gap to prevent the child from slouching or sliding down into the Buckle Strap.




10. Position the center of the Chest Clip even with the child's armpits. Make sure the Shoulder Pads do not interfere with the placement of the Chest Clip.

    If the Shoulder Pads don't allow a proper fit, they can be removed to provide more space for the Chest Clip. Unsnap to remove.


⑨




⑩



11. To test for a properly tightened Harness, using your thumb and forefinger, you should not be able to pinch any excess Harness webbing at the child's shoulder. If needed, pull Adjuster Strap further for a tight and proper fit.
12. Verify that the seat recline angle is correct.
    - If installed with the base, check that the Recline Angle remains in the appropriate range for the child's weight.



    - If installed without the base, ensure that the **BLUE LEVEL LINE** on the shell is level with the ground.

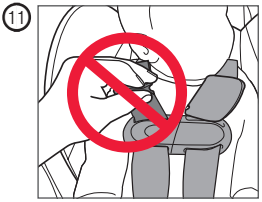


⚠ WARNING! DEATH or SERIOUS INJURY can occur.


- The integrated No-Rethread Harness System cannot be removed from the seat. **NEVER** remove or attempt to remove parts of the Harness System.
- **DO NOT** damage, remove or dispose of any foam padding.
- **NEVER** use Infant Car Seat without a properly installed Seat Cover.

Removing the Seat Cover


1. Disconnect Harness Buckle and Chest Clip.




2. Unsnap the two Shoulder Pads from the Harness.




3. If using the Infant Insert, simply remove it from the Harness Straps.




4. Pull Headrest Cover forward and unsnap the two snaps to remove it from the Harness.




5. Unsnap the two snaps holding the Canopy fabric and push Canopy forward.



6. Unsnap the three snaps from the top of the plastic shell.




7. Unsnap two dual action snaps at side of Infant Car Seat.




8. Remove the Backrest Cover.

   Be sure to remove the bottom corners of the Backrest Cover from the tabs on the inside of the seat before fully removing the cover.




9. Place the Infant Car Seat in Full Recline Mode (pg. 28), then pull the Harness Buckle out of the Seat Cover and remove the Seat Cover from around the Harness Adjuster.




10. Remove the Seat Cover from the Infant Car Seat.

    Be sure to remove the rear corners of the Seat Cover from the tabs on the inside of the seat before fully removing the cover.



Installing the Seat Cover


1. With the Infant Car Seat fully reclined, install the Seat Cover to the Infant Car Seat, being sure to pull it over the tabs on the inside of the seat shell.




2. Install the Seat Cover around the Harness Adjuster, then feed the Harness Buckle into the Seat Cover.



3. Replace the backrest cover, being sure to pull it over the tabs on the inside of the seat shell.




4. Snap two dual action snaps at side of carrier.




5. Snap the three snaps at the top of the plastic shell.


   You may need to lift up on the fabric around the edge of the shell to access these snaps.




6. With the Canopy fully extended, snap the two snaps holding the Canopy fabric in place.




7. Replace the Headrest Cover and snap the two snaps to attach it to the Harness.




8. Reattach Infant Insert to Harness if used.



9. Reattach two Shoulder Pads to Harness.



10. Reconnect Harness Buckle (pg. 31) and Chest Clip (pg. 37).



⚠ WARNING! DEATH or SERIOUS INJURY can occur.


- The FAA recommends that children up to 40 lb (18 kg) use a certified, Harnessed child seat while traveling on an airplane. **THIS CHILD RESTRAINT IS CERTIFIED FOR USE IN AIRCRAFT IF USED WITHOUT THE BASE.**
- **ALWAYS** have the Handle in a **LOCKED** position while using this Child Restraint in an aircraft (see pg. 30).
- **DO NOT** use the Convenience Base when installing Child Restraint in aircraft. Remember to gate check your Base or check it in as luggage if you plan to use it at your destination and **ALWAYS** inspect for damage before use.

1. Ensure that the aircraft seat is in a fully upright position.
2. Position Infant Car Seat **REAR-FACING** in aircraft seat with the foot end firmly against the back of the aircraft seat.

   Install your Infant Car Seat in a window seat to avoid blocking the aisle.
3. Route Lap Belt through both Lap Belt Guides and **BUCKLE THE BELT**.


The aircraft seat belt must be as tight as possible.

Using your full weight, push Infant Car Seat firmly into aircraft seat while pulling on excess seat belt strap to tighten. Then route excess seat belt strap back through belt slots.




4. Check the recline angle. Adjust the seat angle **UNTIL THE BLUE LEVEL LINE ON THE INFANT CAR SEAT IS LEVEL WITH THE FLOOR OF THE AIRCRAFT**.

   If necessary, a tightly rolled airline blanket may be placed under the Infant Car Seat, near the aircraft seat back, to adjust the angle.

   In some instances you may not have enough space to fully recline the Infant Car Seat.

5. Grab the Infant Car Seat at the Belt Guides and pull from side to side and front to back to make sure it is installed correctly. The Infant Car Seat should not move more than 1 in (2.5 cm) in any direction.

   If the Infant Car Seat moves too much, tighten the airplane belts more and recheck.

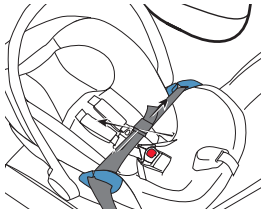IMPORTANT: NEVER use bleach, household cleaners, or solvents. **DO NOT** use lubricants of any kind.

Seat Cover, Shoulder Pads, Infant Insert, and Buckle Cover

- Spot clean as needed with a clean cloth using mild detergent and water.
- Machine wash in cold water on delicate cycle.
- Air dry. **DO NOT** iron.

Harness Straps and Buckle Strap

- Sponge clean using warm water and mild soap. Air dry. **DO NOT** iron.
- Harness straps should **NEVER** be removed.
- Air dry. **DO NOT** iron.

Harness Buckle and Lower Anchor Connectors

- Spot clean as needed with mild detergent and warm water.
- Allow to air dry thoroughly.
- Test by fastening and unfastening until an audible **CLICK** is heard. If there is no **CLICK**, repeat the cleaning procedure.

Plastic and Metal Parts

Wipe clean with mild detergent and warm water.

Safety Checklist

- Did you read and understand this Owner's Manual and all labels found on this Child Restraint?
- Does your child weigh between 4 and 30 lb (1.8 and 13.6 kg)?
- Is your child's height less than 32 in (81 cm)?
- Is the top of your child's head more than 1 in (2.5 cm) from the top of the Infant Car Seat or Headrest, whichever is higher?
- Is the Infant Car Seat **REAR-FACING** in an approved vehicle seat location?
- Is the Infant Car Seat in Car Seat Mode?
- Is the handle **LOCKED** while using this Infant Car Seat in a vehicle?
- If using the Infant Car Seat only, is it secured to the vehicle seat?
- If using the CLOUD G PRO Base, is the Base secured to the vehicle seat, and is the Infant Car Seat firmly attached to the Base?
- If using Rigid LATCH with the vehicle's lower anchors, are both Indicator bars on the Rigid LATCH Connectors showing **GREEN**?
- If the Infant Car Seat is next to a vehicle door or panel, is the adjacent L.S.P. Device extended?
- If using the Load Leg, is it fully open (indicator **GREEN**) and locked firmly against the vehicle floor?
- Is the seat recline angle correct according to the Recline Indicator on the Base or the **BLUE LEVEL LINE** on the shell?
- Is the No-Rethread Harness adjusted to the correct position for the size of the child with the Harness Straps **AT OR JUST BELOW** your child's shoulders?
- Is the Harness snug around the child and secured properly, with the Chest Clip positioned at armpit level?
- Did you check for hot surfaces?
- Is today's date before the "Do Not Use After" date on the Child Restraint?

If you answered **YES** to all of these questions, you are good to go. Please **DRIVE SAFELY!**

Installing your Child Restraint correctly in your vehicle is extremely important for your child's safety. However, it is not always easy to do. **Statistics show that over 75% of Child Restraints are being used incorrectly!**

CYBEX has many trained CPSTs (Child Passenger Safety Technicians) on staff. Please contact us with any questions or concerns about installation, parts, maintenance, or warranty information.

- **Phone:** 1-877-242-5676 (toll-free)
- **E-mail:** info.us@cybex-online.com
- **Web:** www.cybex-online.com
- **Video Appointment:** https://cybex.appointlet.com/

When you contact us, please have the Model Number and Manufactured on Date ready so that we may help you efficiently. This information can be found on the registration card or on the underside of your Infant Car Seat and Base.

You can also make sure your CYBEX CLOUD G PRO is installed correctly by going to https://bit.ly/FINDATECH and contacting a certified CPS Technician near you.

Once your seat has reached its expiration date, we recommend recycling the seat. Contact your local recycling center for the best way to dispose of your seat. We do not recommend giving or selling the seat to anyone, or simply putting it in the garbage.

CYBEX Warranty

LIMITED WARRANTY

CYBEX warrants to the original consumer purchaser that this product will be free from defects in material and workmanship for two (2) years from the date of original purchase (the “Warranty Period”). During the Warranty Period, CYBEX, at its option, may repair or replace this product if it is found by the manufacturer to be defective in material or workmanship. CYBEX reserves the right to discontinue or change parts, fabrics, models, or products, or to substitute this product with a comparable model or product. To make a claim under this warranty, please contact us at info.us@cybex-online.com, call us at 1-877-242-5676, or write to us at:

CYBEX Warranty
COLUMBUS TRADING PARTNERS ATTN:
CYBEX Consumer Services PO Box
410127 Charlotte, NC 28241-9905, USA

An original receipt is required to validate your warranty and shipping charges will be the responsibility of the original consumer purchaser. To expedite the processing of any future warranty claims and to verify the original date of purchase, please complete and mail the pre–addressed owner registration card within thirty (30) days of purchase.

WARRANTY LIMITATIONS

This warranty does not cover the effects of normal wear and tear or damages resulting from negligence, modification, improper installation, accidents, misuse or abuse of this product. It is expressly agreed that the obligations of CYBEX and the original consumer purchaser's remedies under the limited warranty contained herein are exclusive and are strictly limited to the repair or replacement of the product. This limited warranty is conditional upon strict compliance with the provisions of the Owner's Manual. In no event will CYBEX or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

LIMITATION OF WARRANTIES AND STATE/PROVINCIAL LAW RIGHTS:

The warranty and remedies as set forth above are exclusive and in lieu of all others, oral or written, express or implied. To the extent permitted by applicable law, any implied warranties, including implied warranties of merchantability and fitness for a particular purpose, are hereby disclaimed. Some states/provinces do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state/province to state/province. Neither CYBEX nor the dealer selling this product has authorized any person to create for it any other warranty, obligation, or liability in connection with this product.

CYBEX Industrial Limited
Suite 1222, 12/F | Leighton Centre | 77 Leighton Road | Causeway Bay | Hong Kong
www.cybex-online.com

Distributed in the United States by Columbus Trading Partners USA Inc.
2915 Whitehall Park Drive, Suite 300 | Charlotte, NC 28273 | USA
Tel: 1–877–242–5676 | e-mail: info.us@cybex-online.com | www.cybex-online.com

© 2025 CYBEX Industrial Limited. All rights reserved. Printed in China.
This product and its components are subject to change without notice.
Patents pending.

CY_172_1627_D1026